




Tabela z wymiarami standardowych uszczeliek do kołnierzy zgodnie z :

PN-86/H-74374/02 PN-87/H-74364

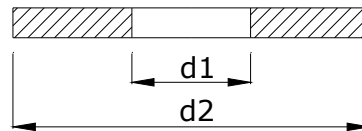

DN	0,25 [MPa]	0,63 [MPa]	1,0 [MPa]	1,6 [MPa]	2,5 [MPa]	4,0 [MPa]	6,3 [MPa]	10 [MPa]
	d1 [mm]	d2 [mm]	d2 [mm]	d2 [mm]	d2 [mm]	d2 [mm]	d2 [mm]	d2 [mm]
10	18	38	38	46	46	46	46	56
15	22	44	44	51	51	51	51	61
20	27	54	54	61	61	61	61	72
25	34	64	64	71	71	71	71	82
32	43	76	76	82	82	82	82	88
40	49	86	86	92	92	92	92	103
50	61	96	96	107	107	107	107	113
65	77	116	116	127	127	127	127	138
80	89	132	132	142	142	142	142	148
100	115	152	152	162	162	168	168	174
125	141	182	182	192	192	194	194	210
150	169	207	207	218	218	224	224	247
175	190	237	237	248	248	254	265	277
200	220	262	262	273	273	284	290	309
225	240	287	287	302	302	310	322	334
250	273	317	317	328	329	340	352	364
300	324	373	373	378	386	400	417	424
350	356	423	423	438	444	457	474	486
400	407	473	473	489	495	514	546	543
450	458	528	528	539	555	564	571	-
500	508	578	578	594	617	624	628	657
600	610	679	679	695	734	731	747	764
700	712	784	784	810	804	833	852	879
800	813	890	890	917	911	942	974	988
900	915	990	990	1017	1011	1042	1084	1108
1000	1016	1090	1090	1124	1128	1154	1194	1220
1200	1220	1290	1307	1341	1342	1364	1398	1452